

Applications of Propositional Logic

Section 1.2

Applications of Propositional Logic: Summary

- Translating English to Propositional Logic
- System Specifications
- Boolean Search
- Logic Puzzles
- Logic Circuits

Translating English Sentences

- Steps to convert an English sentence to a statement in propositional logic
 - Identify atomic propositions and represent using propositional variables.
 - Determine appropriate logical connectives
- “If I go to Harry’s or to the country, I will not go shopping.”
 - p : I go to Harry’s
 - q : I go to the country.
 - r : I will go shopping.

If p or q then not r .

$$(p \vee q) \rightarrow \neg r$$

Example: Translate into propositional logic

“You can access the Internet from campus **only if** you are a computer science major **or** you are **not** a freshman.”

One Solution:

a: “You can access the internet from campus”

c: “You are a computer science major”

f: “You are a freshman.”

$$a \rightarrow (c \vee \neg f)$$

System Specifications

- System and Software engineers take requirements in English and express them in a precise **specification** language based on logic.

Example: Express in propositional logic:

“The automated reply **cannot** be sent **when** the file system is full”

One solution: Let p denote “The automated reply can be sent” and q denote “The file system is full.”

$$q \rightarrow \neg p$$

Consistent System Specifications

Definition: A list of propositions is *consistent* if it is possible to assign truth values (T/F) to the proposition variables so that **each compound proposition in the list is true.**

Exercise: Are these specifications consistent?

- “The diagnostic message is stored in the buffer or it is retransmitted.” $p \vee q$
- “The diagnostic message is not stored in the buffer.” $\neg p$
- “If the diagnostic message is stored in the buffer, then it is retransmitted.” $p \rightarrow q$

Solution: p : “The diagnostic message is stored in the buffer.”

q : “The diagnostic message is retransmitted.”

When p is false and q is true all three statements are true. So the specification is *consistent*.

Consistent System Specifications

Exercise: What if the specification “The diagnostic message is not retransmitted” is added? Is it still consistent?

- “The diagnostic message is stored in the buffer or it is retransmitted.” $p \vee q$
- “The diagnostic message is not stored in the buffer.” $\neg p$
- “If the diagnostic message is stored in the buffer, then it is retransmitted.” $p \rightarrow q$
- “The diagnostic message is not retransmitted.” $\neg q$

Solution: There is no satisfying assignment. The specification is **not consistent**.

Consistent System Specifications

- “The diagnostic message is stored in the buffer or it is retransmitted.”
- “The diagnostic message is not stored in the buffer.”
- “If the diagnostic message is stored in the buffer, then it is retransmitted.”
- What if “The diagnostic message is not retransmitted” is added.

p	q	$p \vee q$	$\neg p$	$p \rightarrow q$	$\neg q$
F	F	F	T	T	T
F	T	T	T	T	F
T	F	T	F	F	T
T	T	T	F	T	F

Boolean Search

- Logical connectives are used extensively in searches of large collections of information.
- Boolean search is a type of search allowing users to combine keywords with Logical connectives to further produce more relevant results.
- In Boolean searches,
 - *AND* is used to match records that contain both of two search terms.
 - *OR* is used to match one or both of two search terms.
 - *NOT* (sometimes written as *AND NOT*) is used to exclude a particular search term.
- Example (Web Page Searching):
 - Most Web search engines support Boolean searching techniques.
 - For instance, using Boolean searching to find Web pages about universities in New Mexico.
 - Search “NEW *AND* MEXICO *AND* UNIVERSITIES”.
 - The results of this search will include those pages that contain the three words NEW, MEXICO, and UNIVERSITIES.

Logic Puzzles



Raymond
Smullyan
(Born 1919)

- An island has two kinds of inhabitants, *knights*, who always tell the truth, and *knaves*, who always lie.
- You go to the island and meet A and B.
 - A says “B is a knight.”
 - B says “The two of us are of opposite types.”

Example: What are the types of A and B?

Solution: Let p : “A is a knight” and q : “B is a knight.”


So, then $\neg p$: “A is a knave” and $\neg q$: “B is a knave.”

- If A is a knight, then p is true. Since knights tell the truth, q must also be true. Then $(p \wedge \neg q) \vee (\neg p \wedge q)$ would have to be true, but it is not. So, A is not a knight and therefore $\neg p$ must be true.
- If A is a knave, then B must not be a knight since knaves always lie. So, then both $\neg p$ and $\neg q$ hold since both are knaves.


Logic Circuits

(Studied in depth in Chapter 12)


- Electronic circuits; each input/output signal can be viewed as a 0 or 1.
 - 0 represents **False/Off**
 - 1 represents **True/On**
- Complicated circuits are constructed from three basic circuits called gates.



Inverter



OR gate




AND gate


- The inverter (**NOT gate**) takes an input bit and produces the negation of that bit.
- The **OR gate** takes two input bits and produces the value equivalent to the disjunction of the two bits.
- The **AND gate** takes two input bits and produces the value equivalent to the conjunction of the two bits.

Logic Circuits


(Studied in depth in Chapter 12)



Inverter




OR gate



AND gate

- More complicated digital circuits can be constructed by combining these basic circuits to produce the desired output given the input signals by building a circuit for each piece of the output expression and then combining them.
- For example, this circuit results in $(p \wedge \neg q) \vee \neg r$

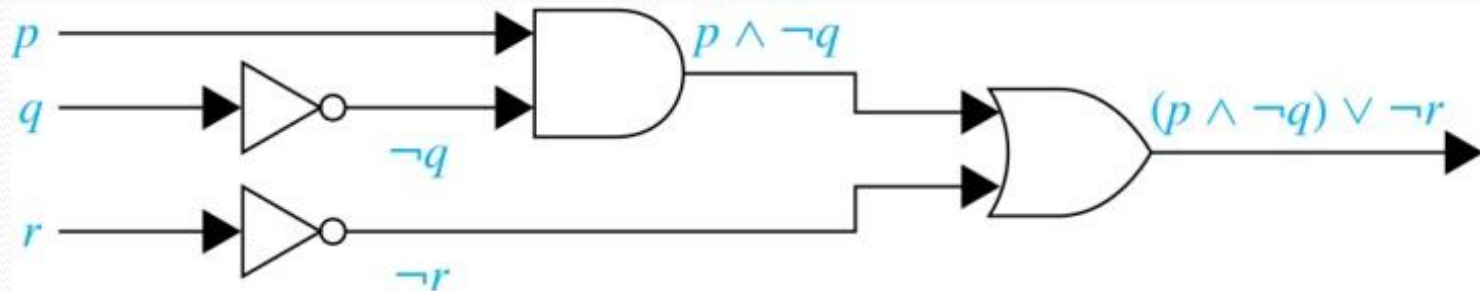

Example

- Build a digital circuit that produces the output:
 - $(p \vee \neg r) \wedge (\neg p \vee (q \vee \neg r))$
 - when given input bits p , q , and r .

